

## ENTRY

QUERRA FLOOR PANELS. FOR  
EVERY CHALLENGE 7

BEAUTIFUL AND PRACTICAL 8

## QUERRA

CLASSIC WR 10

HARMONY WR 14

SLIM PRESTIGE WR 18

PRESTIGE WR 22

BALANCE WR 26

BALANCE PLUS WR 30

MAGNA WR 34

MAGNA PLUS WR 40

FEATURES OF QUERRA 46

PARAMETERS 52

PATTERN LIST 54

FLOOR SYSTEM 60

VOXBOX 64





FREEDOM BEGINS

# At home

At VOX, we believe that true freedom begins at home, and that in interiors, personal needs and lifestyles of the household members are more important than defined styles. That is why our goal is to inspire, advise and provide comprehensive interior solutions - matching collections of furniture, doors, floors and decorative walls.







## PANELS FLOOR QUERRA. FOR EVERY CHALLENGE

When creating a collection of VOX floors, we put the stylistic features of the products on par with the technical parameters. Querra laminated floor panels are the result of cooperation between VOX stylists and experts with the best manufacturers. A wide selection of colors, high abrasion class, wide price range. In the VOX offer you will find panels tailored to your requirements and budget. Waterproofness allows the panels to be used in more demanding rooms, such as the kitchen or bathroom.






BEAUTIFUL  
AND PRACTICAL



Laminated panels are currently one of the most popular types of floor finishing. Dozens of patterns, deep structures, ease of keeping clean and the possibility of using them in rooms with different requirements make them a practical and satisfying choice for many years. All Querra collections have an abrasion class of AC4 or AC5 and a four-sided V-groove and are compatible with underfloor heating.





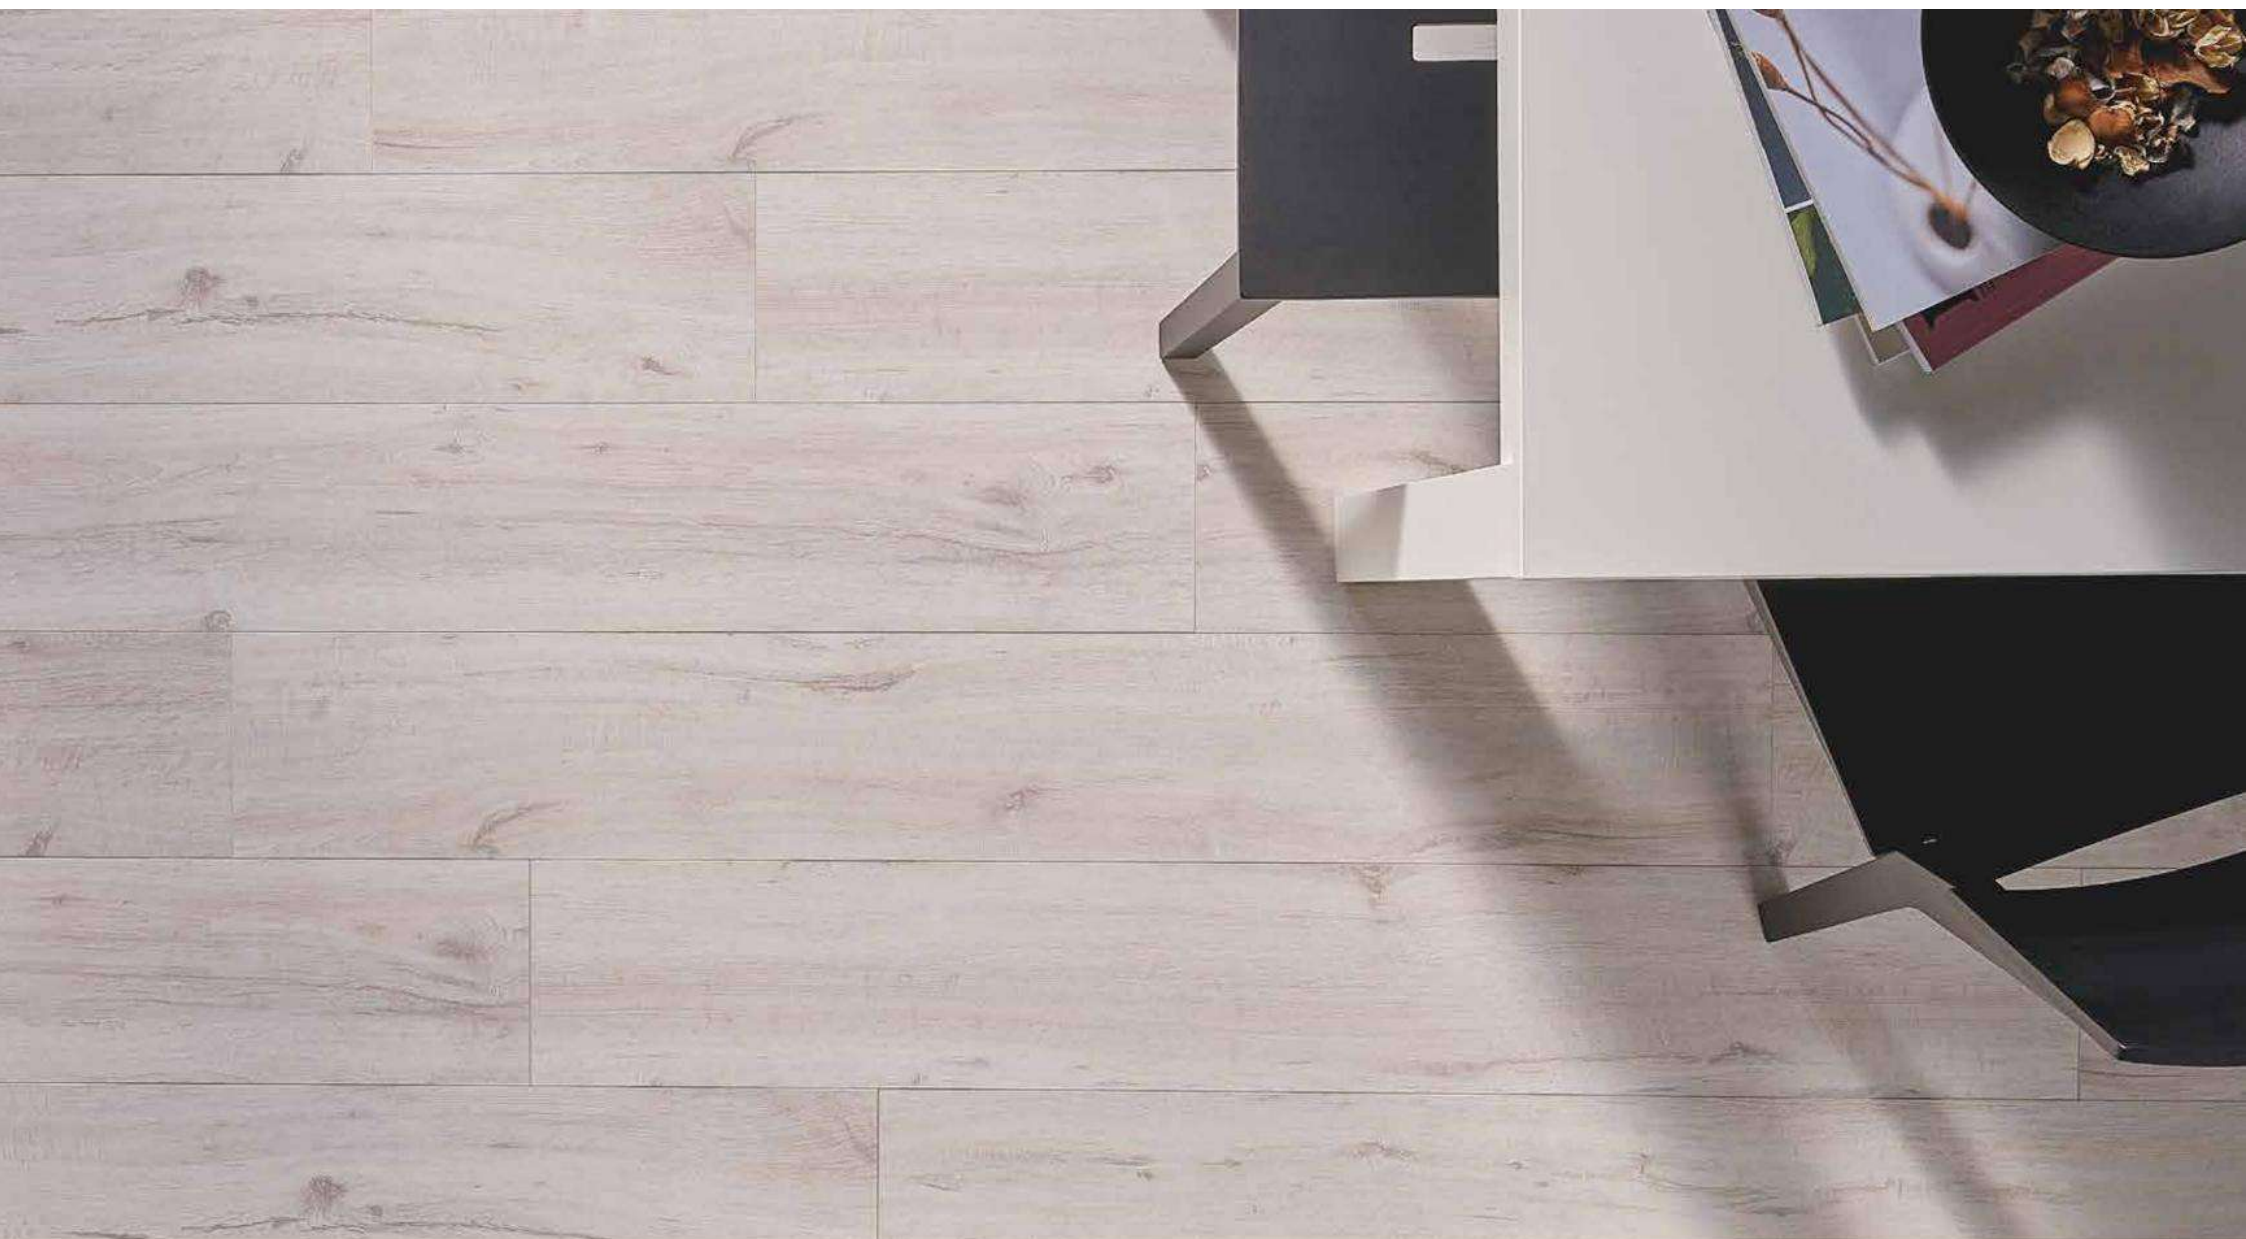

IN THE PICTURE: NORD OAK



QUERRA CLASSIC WR COLLECTION



QUERRA CLASSIC WR, ALMOND OAK

## QUERRA CLASSIC WR



DAB ALMOND\*



DAB COPPER\*\*


Dimensions | 1285 x 192 mm  
Thickness | 8 mm

Abrasion class | AC4  
Water resistance | 48 h

Structure | \* matt wood / \*\* glossy wood  
15-year warranty

The Classic WR collection includes 5 designs. See all on pages 54-55.



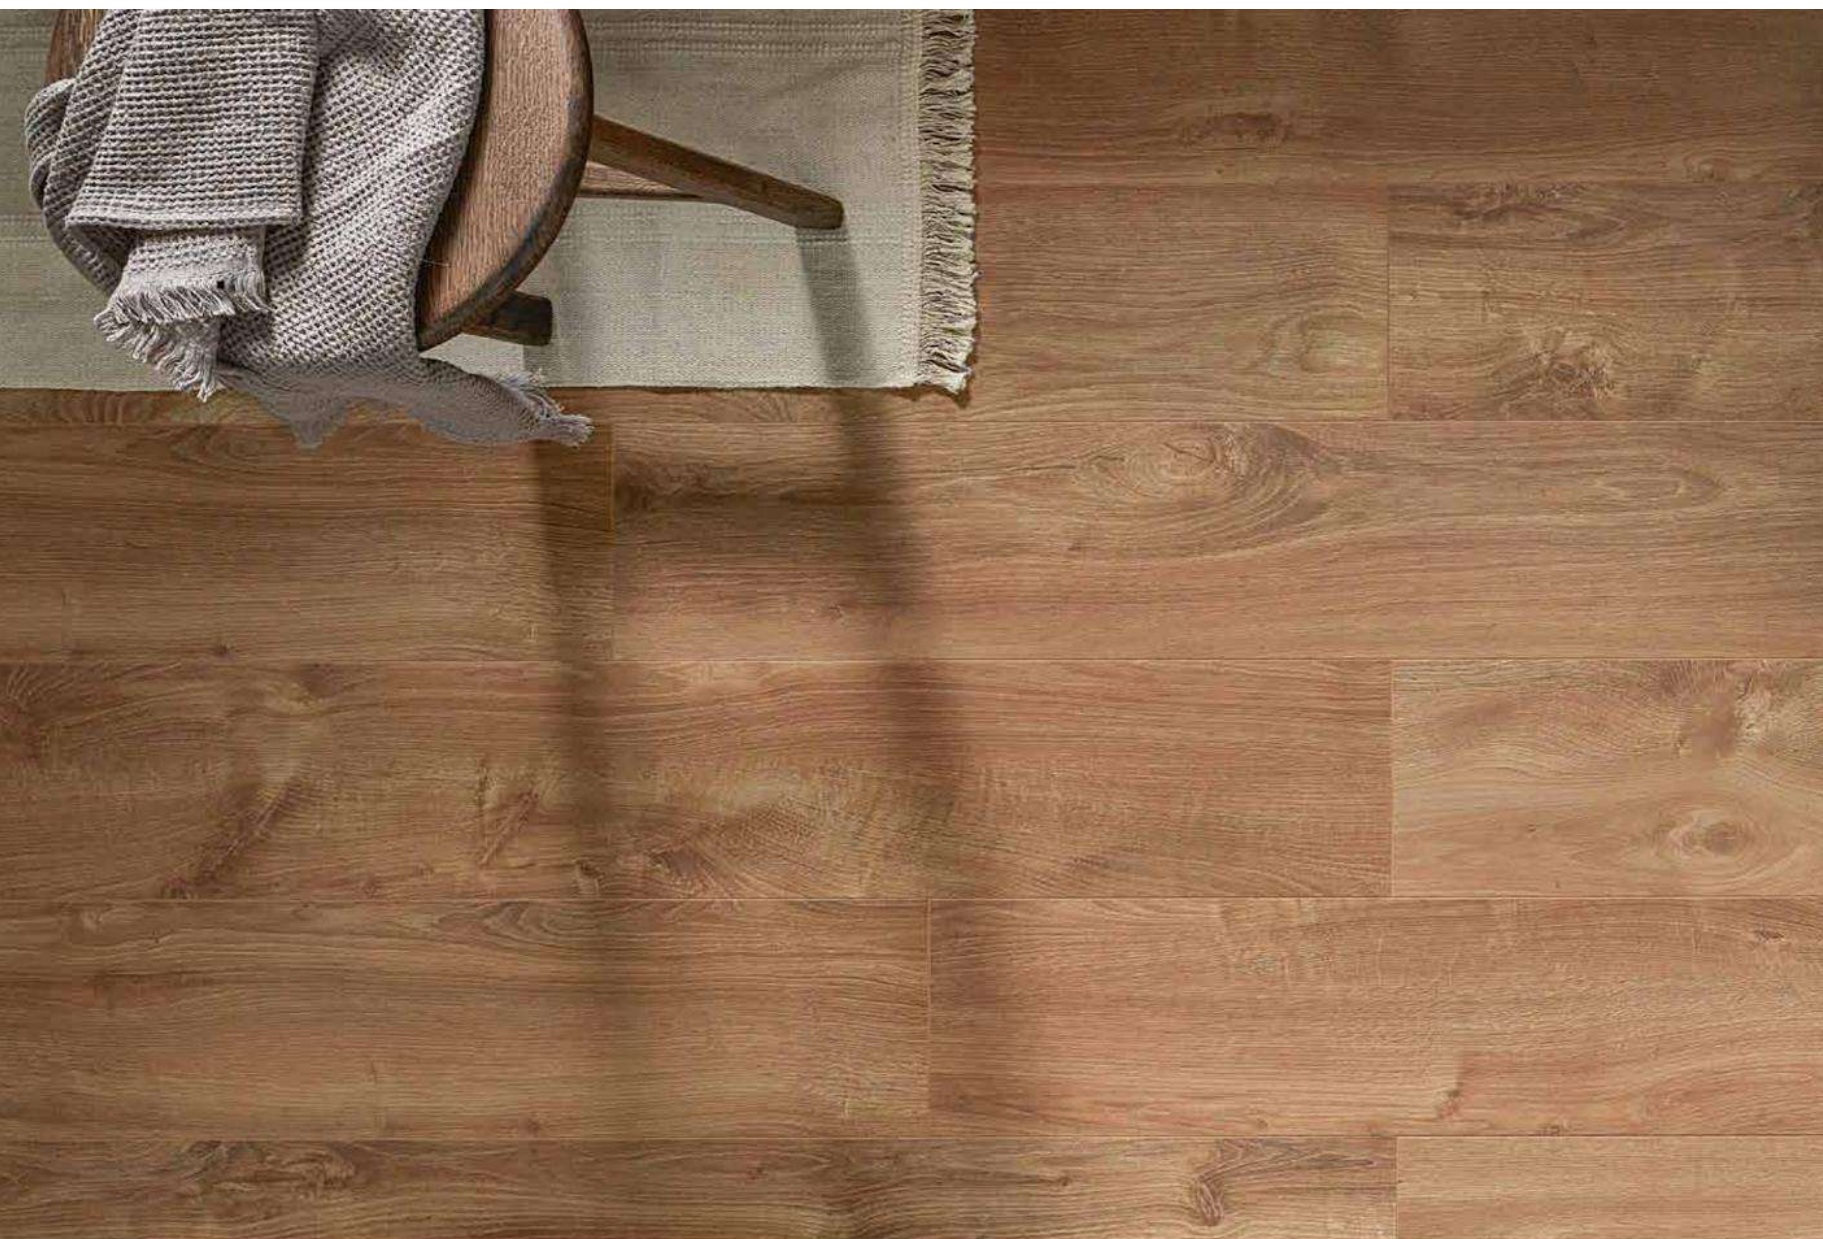

IN THE PICTURE: CALM OAK



QUERRA HARMONY WR COLLECTION



# QUERRA HARMONY WR



CALDA OAK\*



OAK CALM\*\*

Dimensions | 1285 x 192 mm

Thickness | 8 mm

Abrasion class | AC5

Waterproof | 48 h


Structure | \* matt wood /\*\* glossy wood

25-year warranty



QUERRA HARMONY WR, OAK CALM



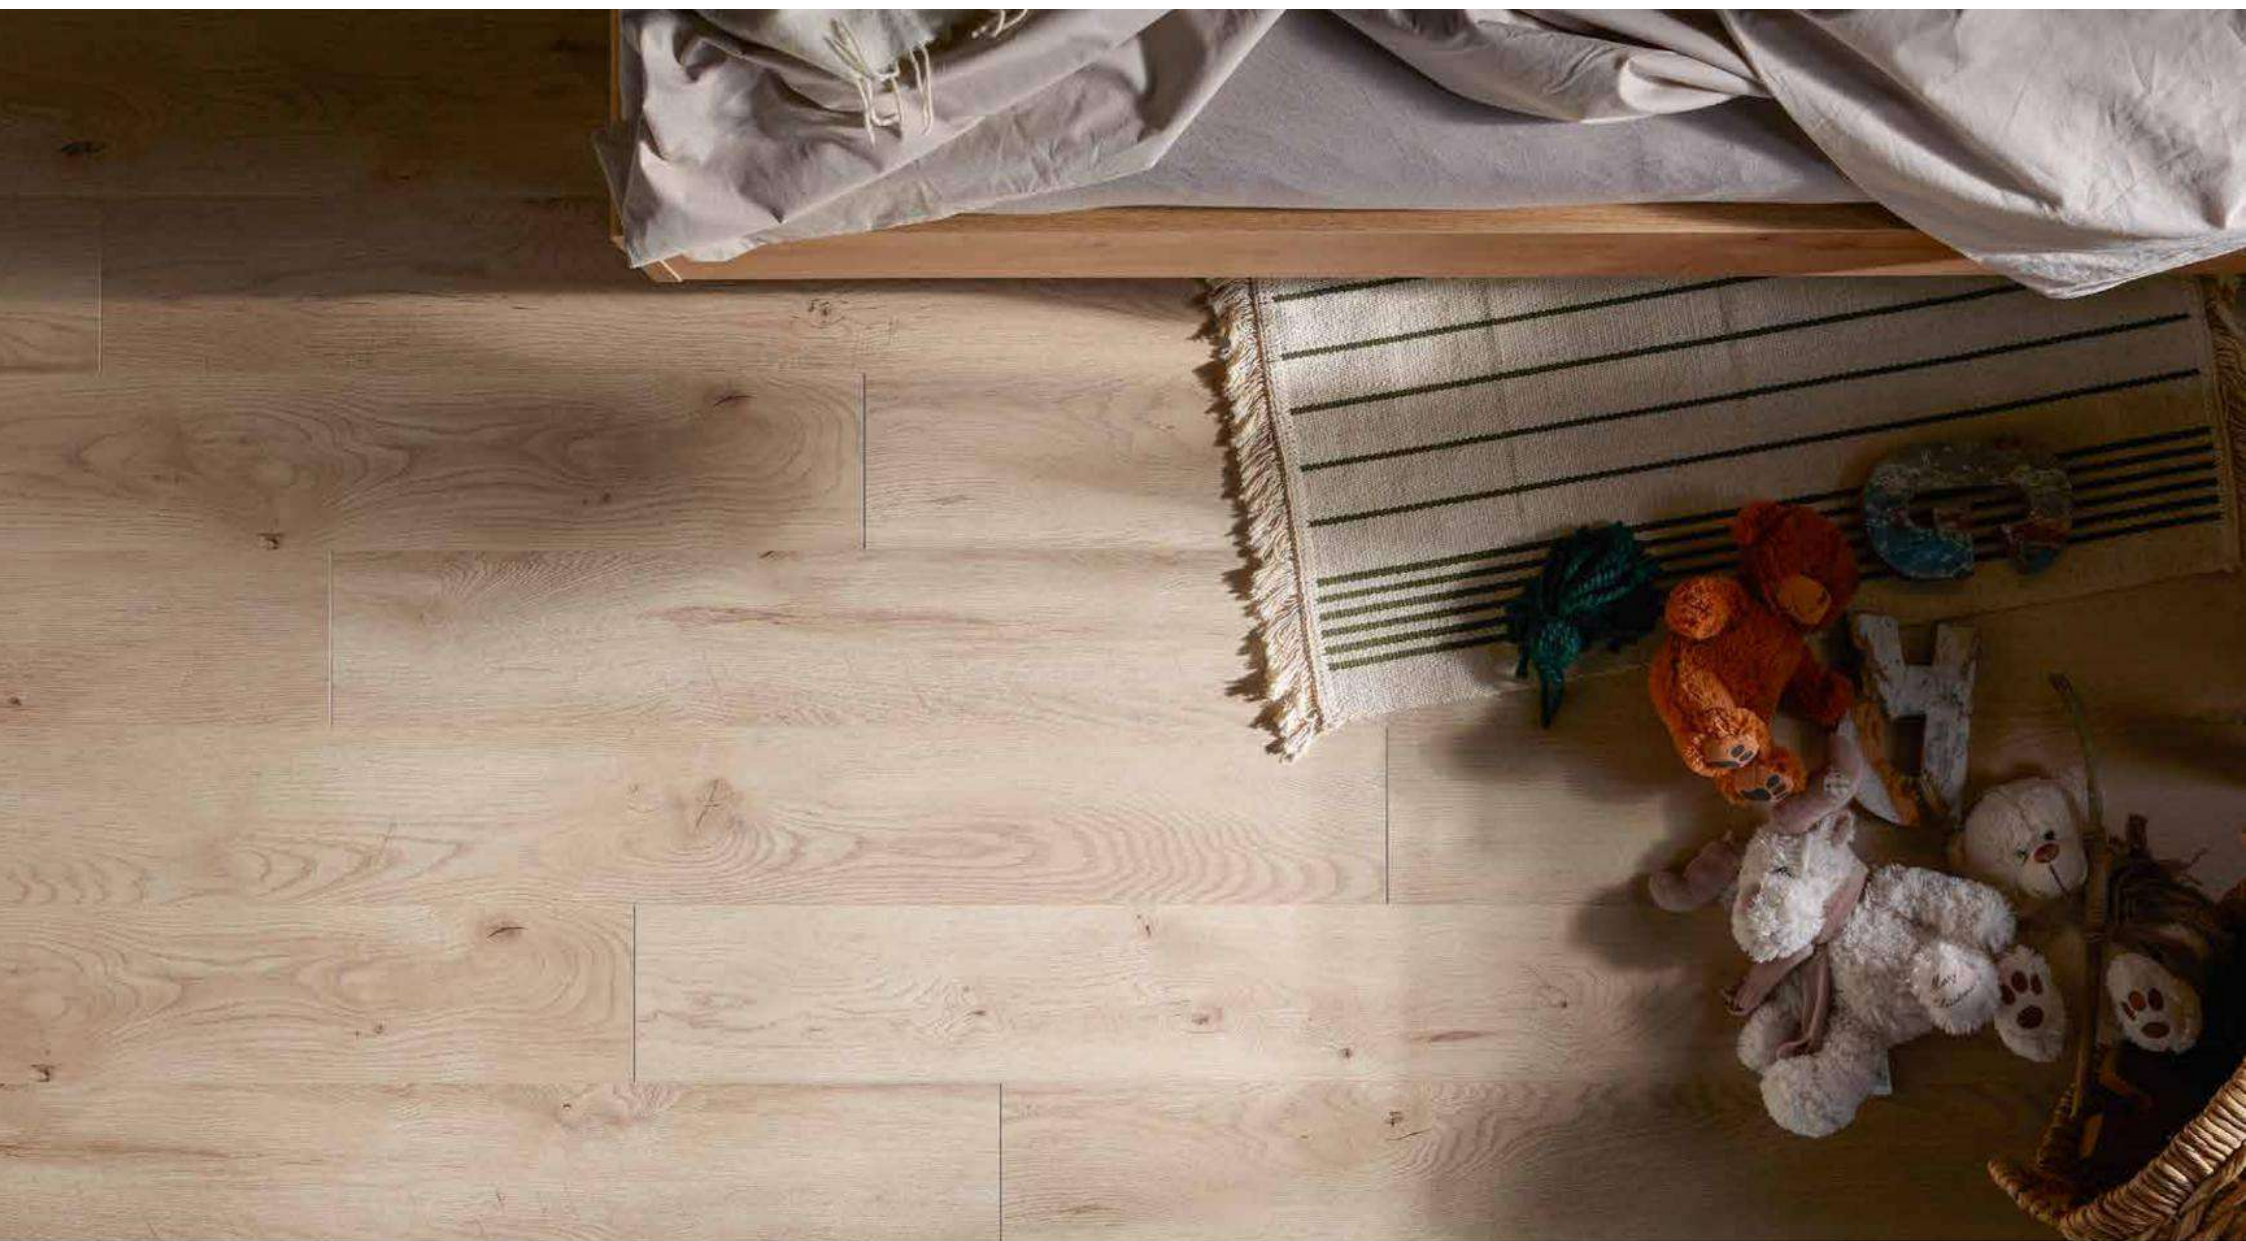

IN THE PICTURE: GENOVA DAB



QUERRA SLIM PRESTIGE WR COLLECTION





QUERRA SLIM PRESTIGE WR, DAB GENOA

## QUERRA SLIM PRESTIGE WR



GENOA OAK



CRESTON OAK

Dimensions | 1285 x 156 mm

Thickness | 8mm

Abrasion class |

AC5

Waterproof |


48 h

Structure | And synchronous, clear traces of saw cuts

25-year warranty

The Slim Prestige WR collection includes 5 designs. See all on pages 54-55.



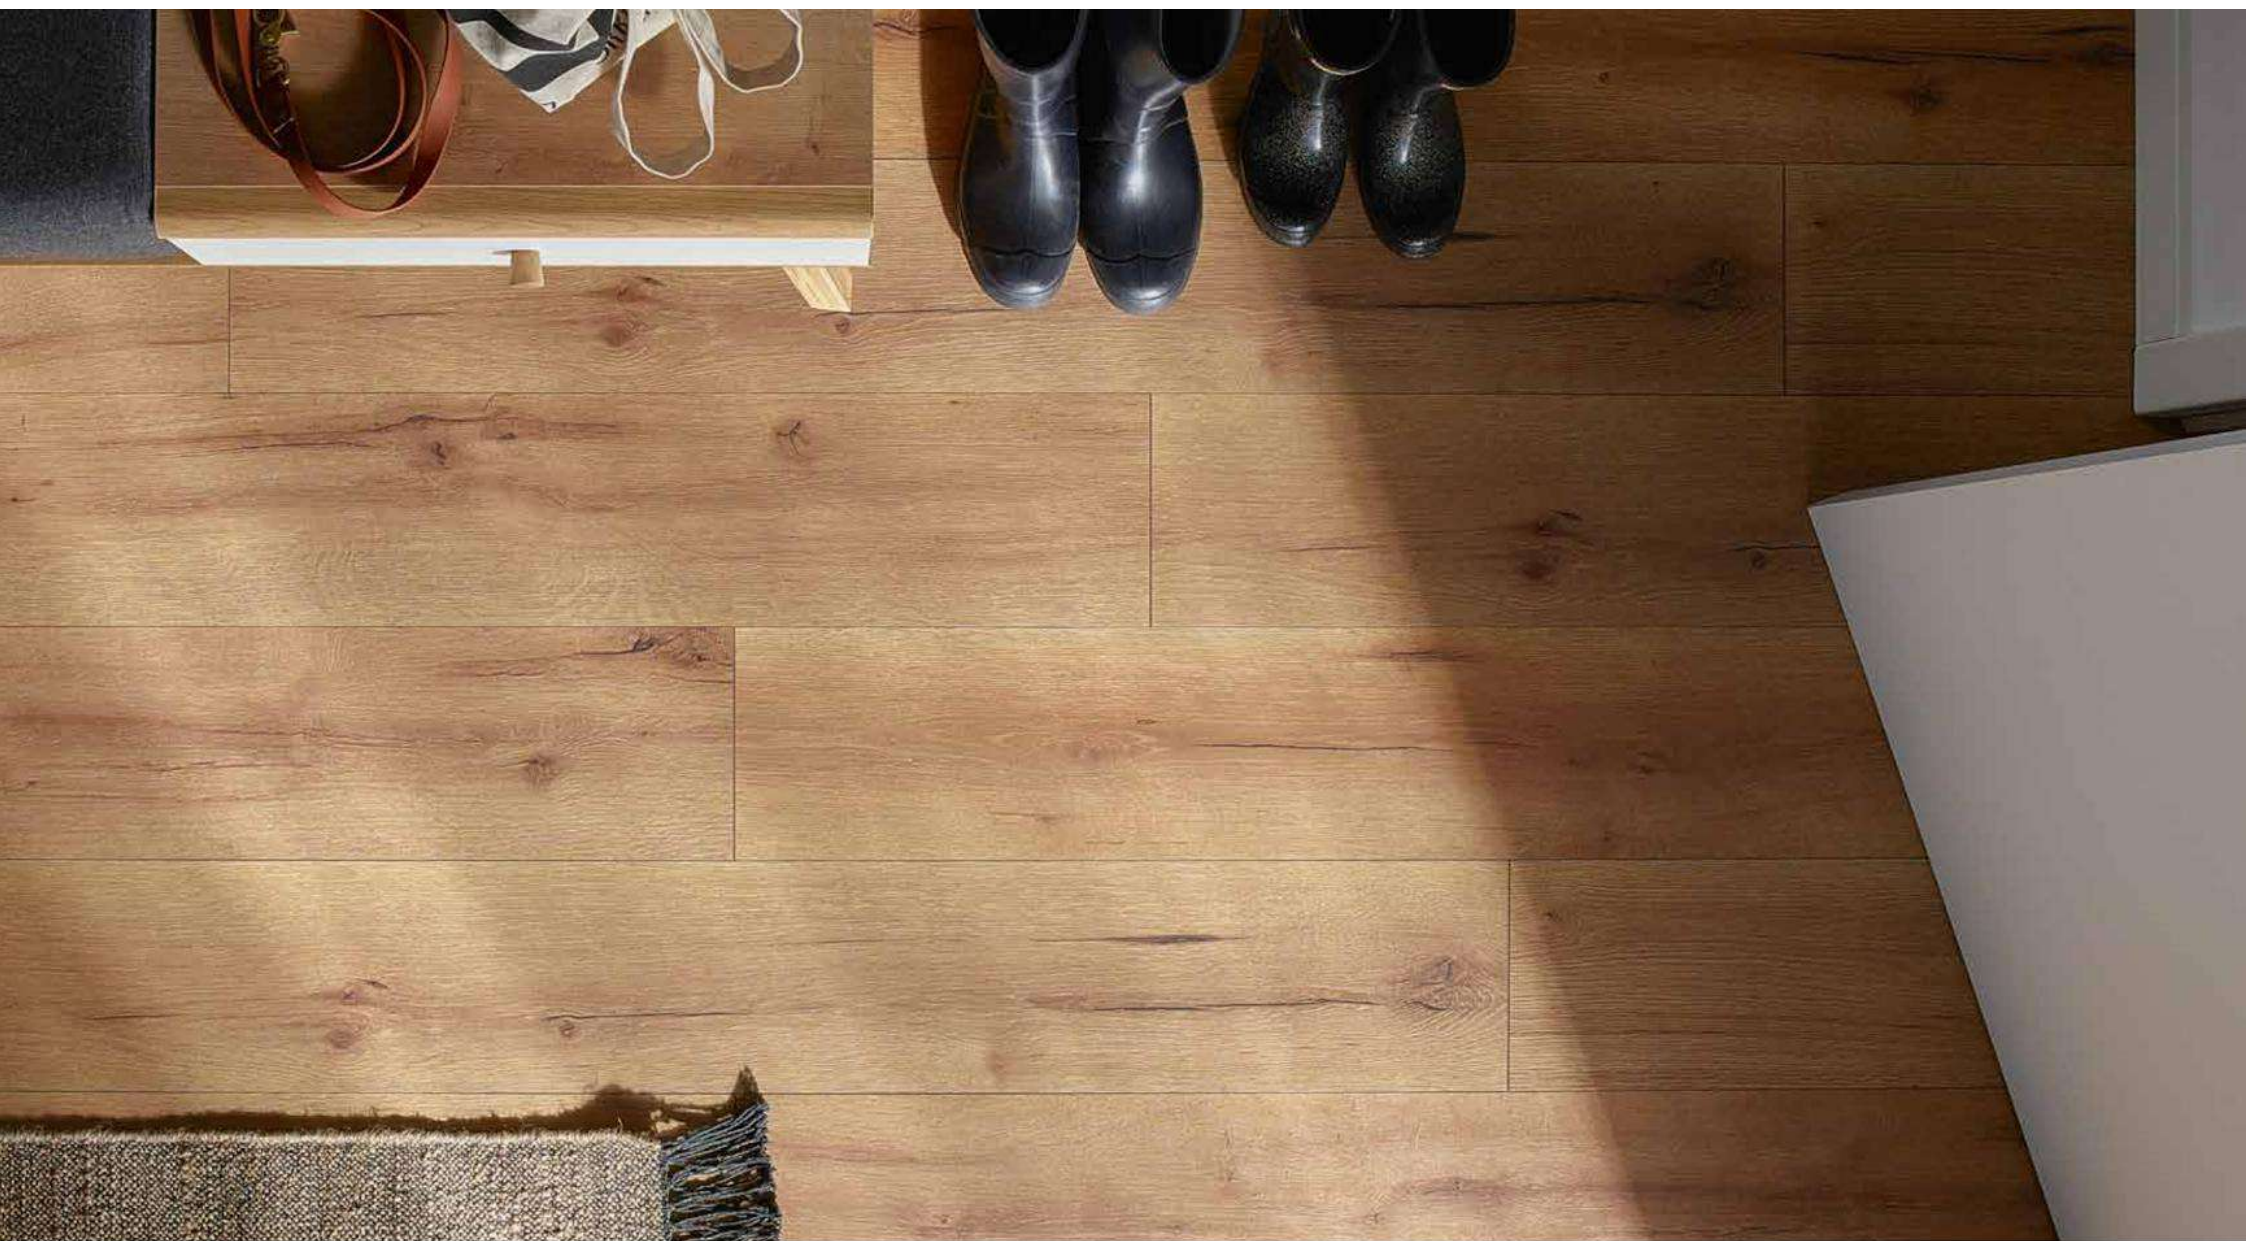

IN THE PICTURE: ORSO OAK



QUERRA PRESTIGE WR COLLECTION



# QUERRA PRESTIGE WR




OAK LUVA\*



DAB ORSO\*\*

Dimensions	1285 x 192 mm	Abrasion class	AC5	Structure	*synchronous, clear saw cut marks/**synchronous
Thickness	8 mm	Water resistance	48 h		25-year warranty

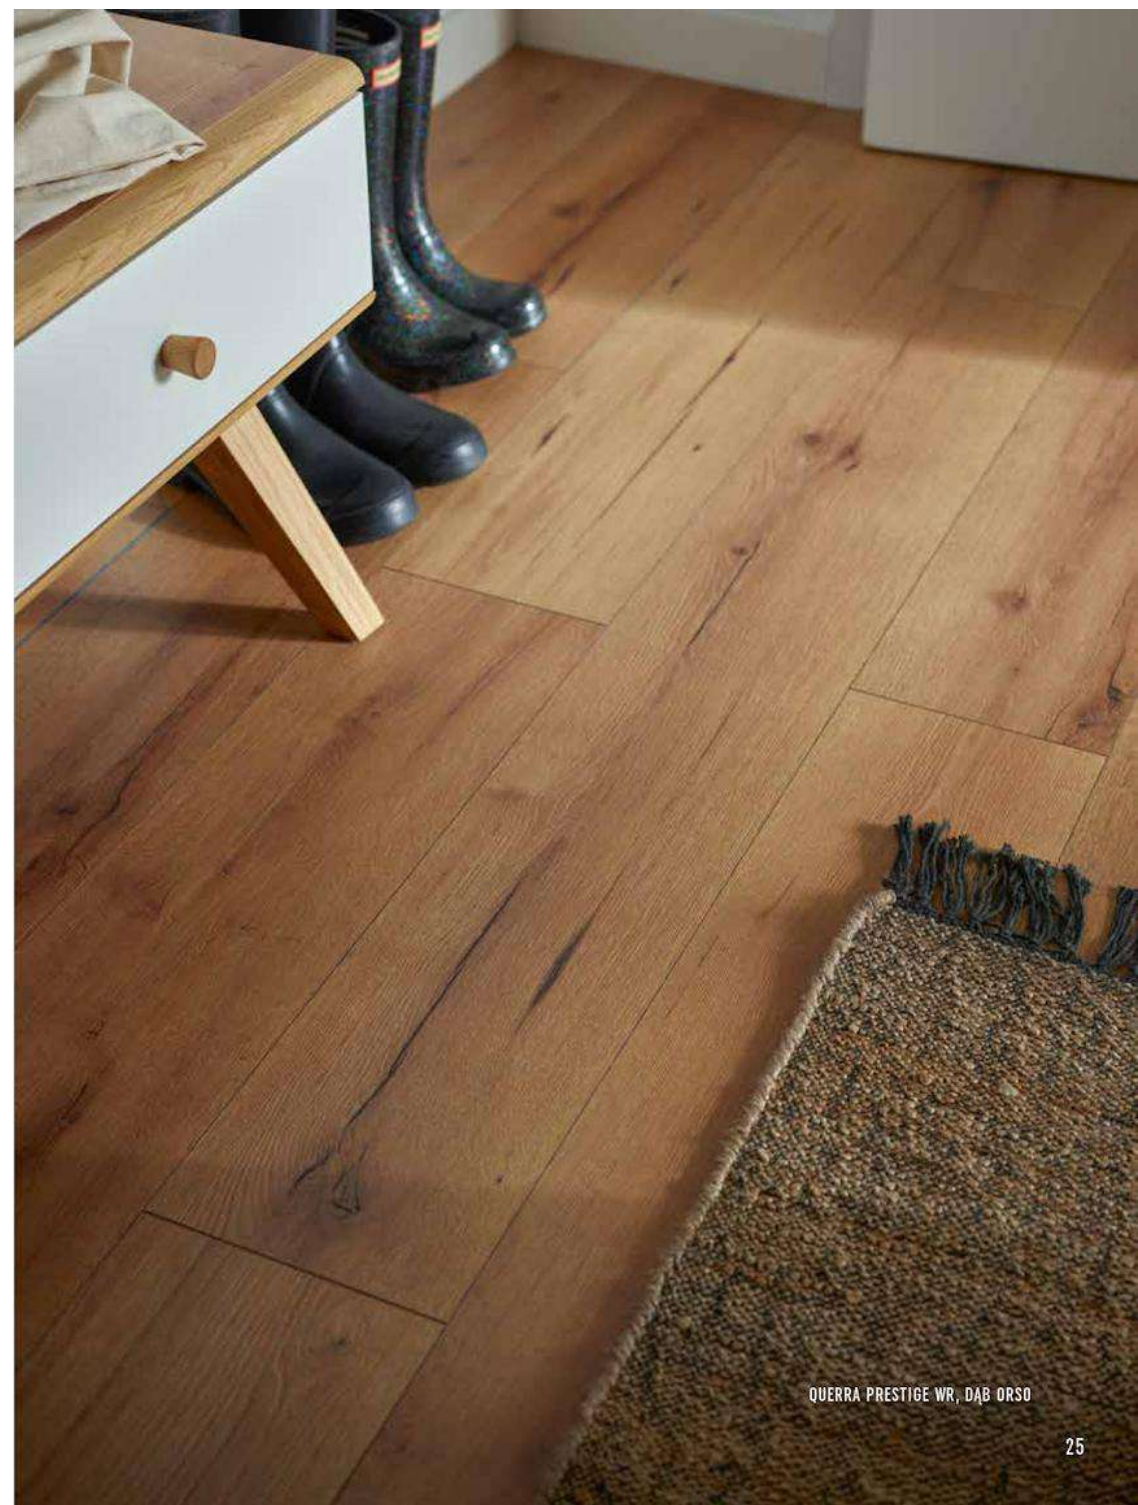

QUERRA PRESTIGE WR, DAB ORSO





IN THE PICTURE: TERSA OAK



QUERRA BALANCE WR COLLECTION





QUERRA BALANCE WR, DĄB CREMSO

## QUERRA BALANCE WR



CREMSO OAK



MORA OAK

Dimensions | 1380 x 191 mm

Thickness | 8mm

Abrasion class | AC5

Water resistance | 24 h

Structure | And synchronous

30-year warranty

The Balance WR collection includes 6 designs. See all on pages 56-57.





IN THE PICTURE: CRUD OAK



QUERRA BALANCE PLUS WR COLLECTION



# QUERRA BALANCE PLUS WR



MARRO OAK



SKOGEN OAK

Dimensions | 1380 x 242 mm

Thickness | 8 mm

Abrasion class | AC5

Water resistance | 72h

Structure | And synchronous

30-year warranty



QUERRA BALANCE PLUS WR, DĄB SKOGEN





IN THE PICTURE: ALBERO OAK



QUERRA MAGNA WR COLLECTION





QUERRA MAGNA WR, DĄB FUERTA

## QUERRA MAGNA WR



FUERTA OAK



DĄB VERME

Dimensions | 1261 x 192 mm

Thickness | 8mm

Abrasion class | AC4

Water resistance | 24 h

Structure | And synchronous

25-year warranty

The Magna WR collection includes 5 designs. See all on pages 58-59.



# QUERRA MAGNA WR



DAB SARGAS\*



OAK ALBERO\*\*

Dimensions | 1261 x 192 mm  
Thickness | 8 mm


Abrasion class | AC4  
Water resistance | 24 h

Structure\* | synchronous/\*\* wood matte  
25-year warranty



QUERRA MAGNA WR, ALBERO OAK



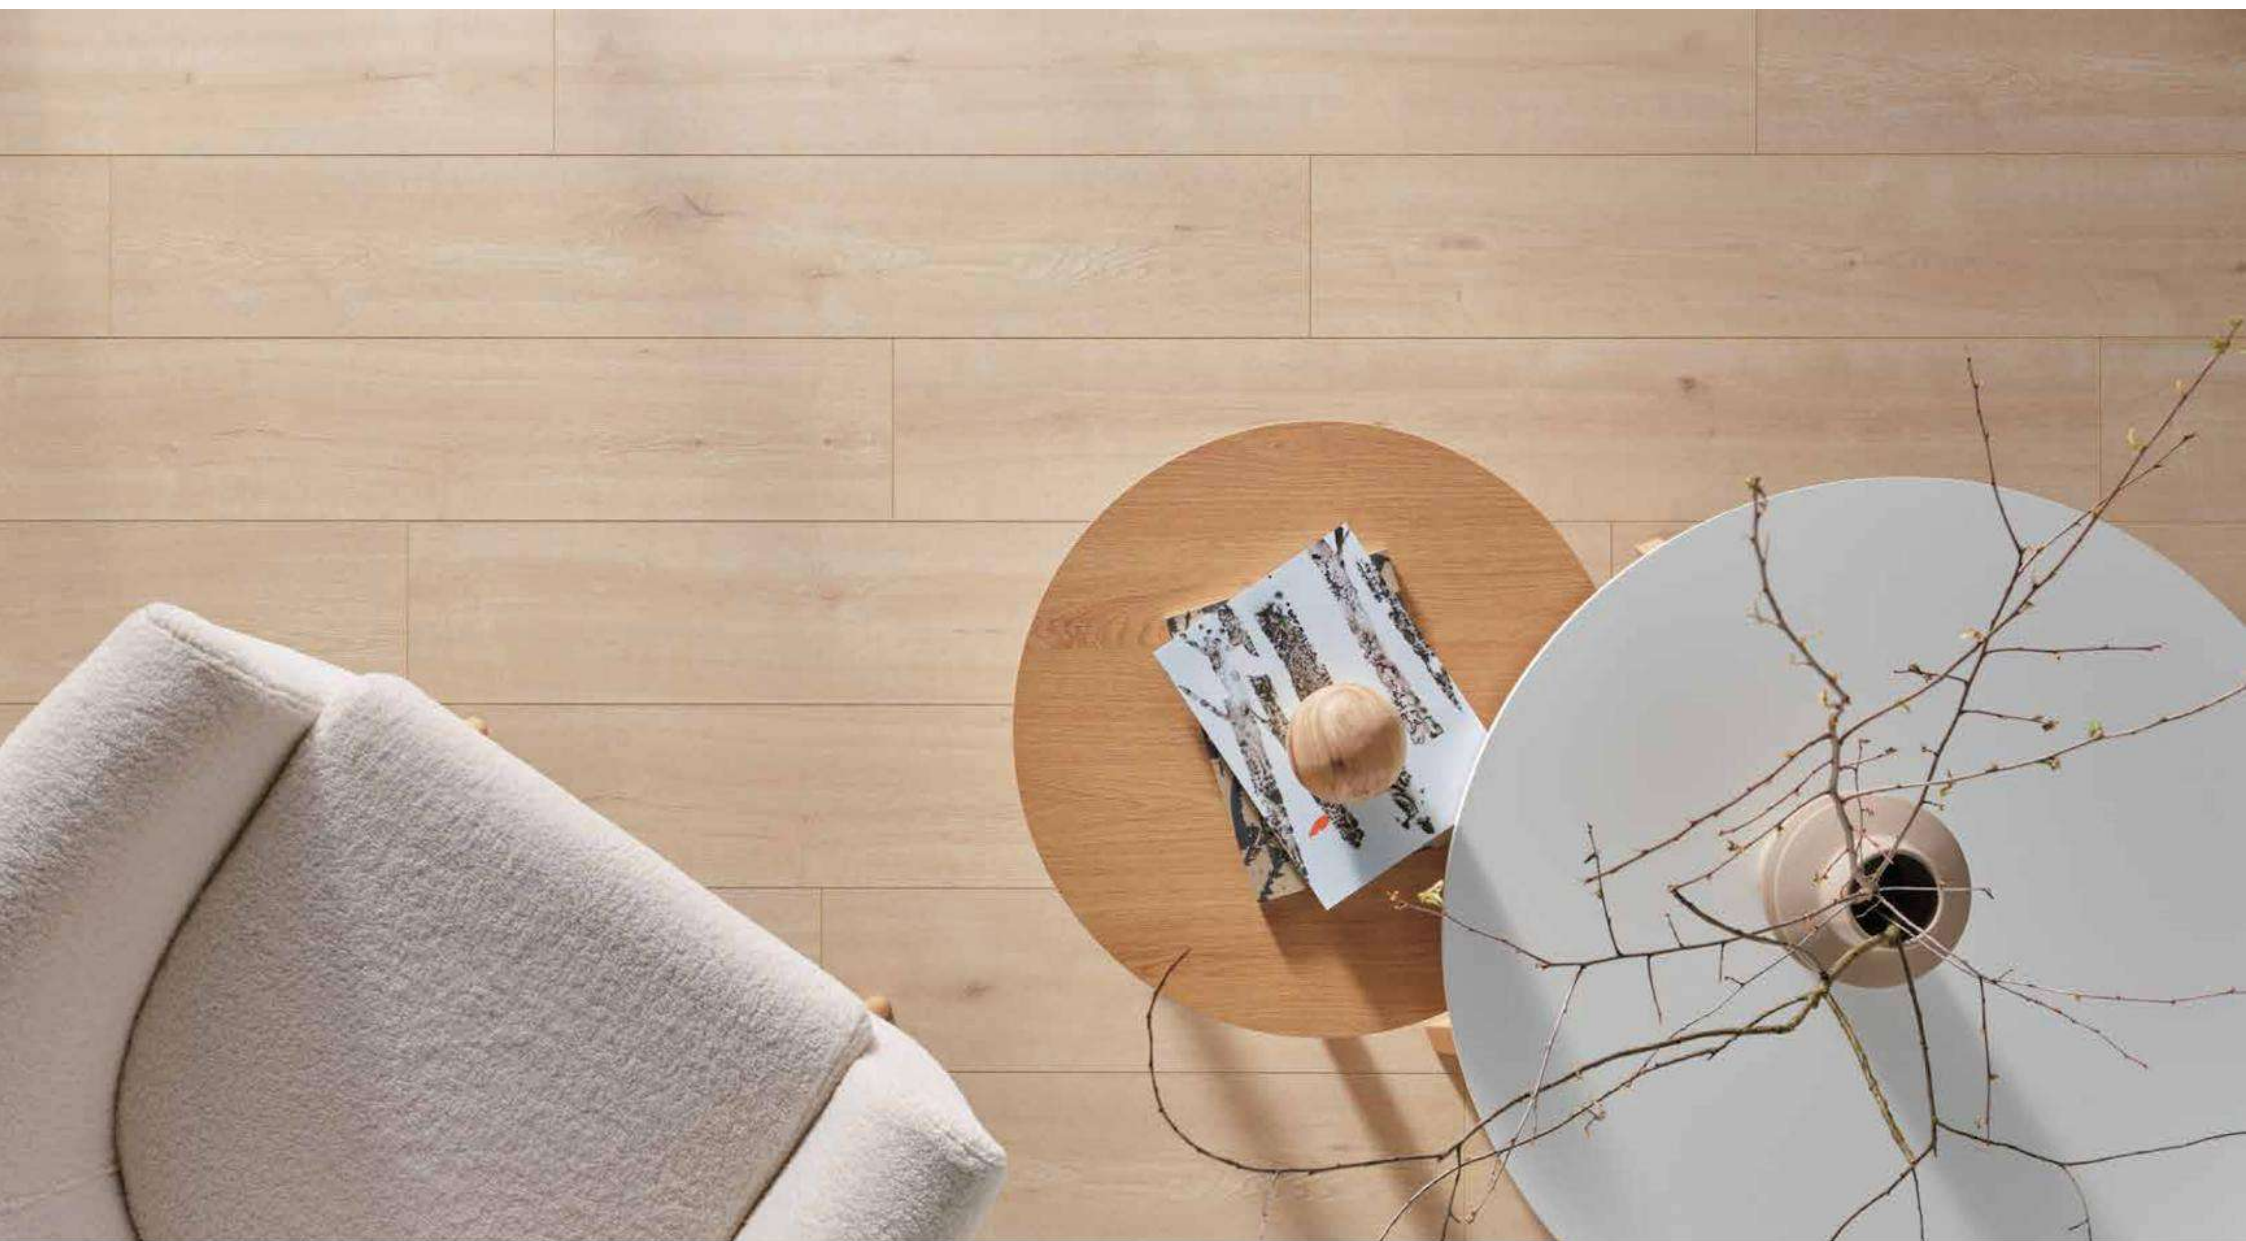

IN THE PICTURE: SIBER OAK



QUERRA MAGNA PLUS WR COLLECTION





QUERRA MAGNA PLUS WR, ALVA OAK

## QUERRA MAGNA PLUS WR



DAB ALVA\*



DAB GINGER\*\*

Dimensions | 1261 x 192 mm

Thickness | 8mm

Abrasion class | AC5

Water resistance | 24h

Structure | \* wood matt /\*\* synchronous

25-year warranty

The Magna Plus WR collection includes 5 designs. See all on page 58.



# QUERRA MAGNA PLUS WR



HOLY OAK



LINO OAK

Dimensions | 1261 x 192 mm  
Thickness | 8 mm

Abrasion class | AC5  
Water resistance | 24h

Structure | And synchronous  
25-year warranty



QUERRA MAGNA PLUS WR, LINO OAK



## INCREASED WATER RESISTANCE



The key feature of all Querra collections is water resistance. The introduction of WR (water resistance) technology to laminated panels is a revolutionary change that significantly expands the possibilities of using this flooring solution. Modern, improved locks and a modified HDF board with higher density prevent the absorption of water by the carrier board from 24 to 72 hours (depending on the collection). Thanks to these properties, Querra panels can be installed in rooms exposed to moisture, e.g. in the kitchen and bathroom (excluding the shower area).



## WATERPROOF ZIPPERS



To further increase water resistance, we have improved the design of the panel lock. The solutions we currently use (Megaloc Aqua Protect, Aqua Pearl and Uniclic) are covered with a four-fold impregnation film, which reduces moisture absorption, and the tighter fit prevents water from getting under the floor. The last element influencing the parameters related to water resistance is the reduction of the V-groove, thanks to which the surface through which moisture can penetrate is smaller.






# RESILIENCE



Querra laminate panels are a long-term investment. Out of the eight Querra collections, six are characterized by a higher abrasion class of AC5. Thanks to the reinforced upper layer of the panel, the floor is resistant to micro-scratches and increased abrasion frequency, and its structure is maintained for years. The AC5 class means high durability of the panels, which is why they can be installed in offices, shops, restaurants, communication routes, etc. High durability is confirmed by a guarantee from 15 to 30 years depending on the collection (applies to use in domestic premises).



## WITHOUT EXPANSION

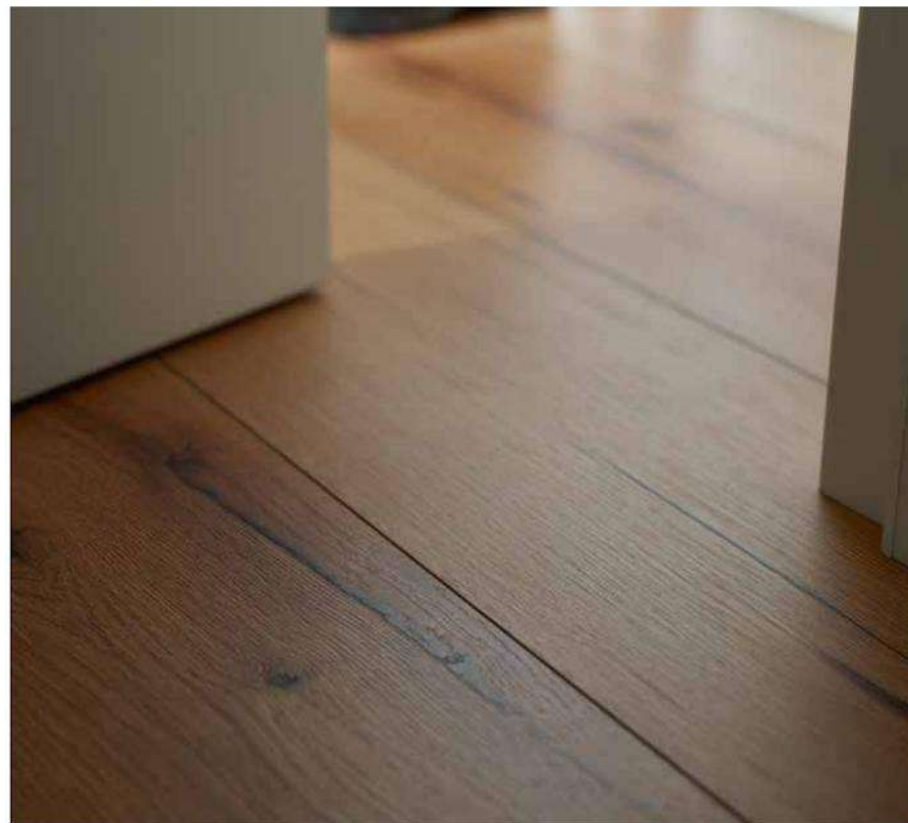

A threshold expansion joint is a special gap left between rooms, masked by a threshold strip. In the case of the Querra Balance Plus WR collection, expansion joints between rooms are not necessary. This allows you to lay a uniform floor throughout the apartment, on a surface of up to 64 m<sup>2</sup>.



PIOTR SZCZĘŚNIAK  
TECHNICAL EXPERT VOX




## PANEL CONSTRUCTION



## PANEL LOCKS

In our panels we use durable Megaloc Aqua Protect, Aqua Pearl and Uniclic locks. They are characterized by a similar structure and identical operating principle, and therefore - high durability and precision of fit guaranteeing waterproofness.

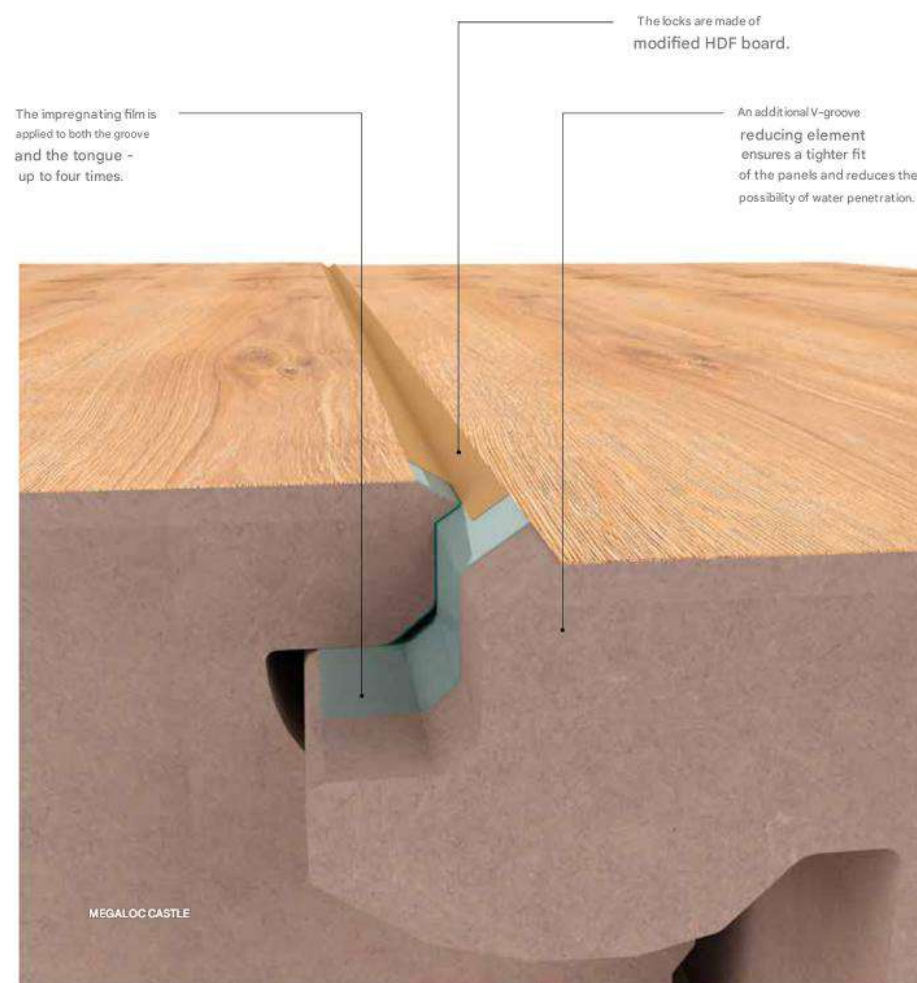



## QUERRA PANELS PARAMETERS

	QUERRA CLASSIC WR	QUERRA HARMONY WR	QUERRA SLIM PRESTIGE WR	QUERRA PRESTIGE WR
DIMENSIONS	1285 x 192 mm	1285 x 192 mm	1285 x 158 mm	1285 x 192 mm
THICKNESS	8 mm	8 mm	8 mm	8 mm
ABRASION CLASS	AC4	AC5	AC5	AC5
NUMBER OF PIECES IN PACKAGING	8	8	10	8
SURFACE IN PACKAGING	1,973 m <sup>2</sup>	1,973 m <sup>2</sup>	2,030 m <sup>2</sup>	1,973 m <sup>2</sup>
PANEL FINISH	four-sided V-groove			
PANEL STRUCTURE	Almond Oak matt wood  Dab Copper Modest Oak Nord Oak glossy wood  Oak Trust synchronous	Oak Calda wood matt  Calm Oak Nest Oak Rustic Oak glossy wood	Dab Sherwood Vernon Oak synchronous  Creston Oak Ember Oak Genoa Oak synchronous - clear saw cut marks	Oak Orso synchronous  Leggero oak Luva Oak synchronous - clear saw cut marks
UNDERFLOOR HEATING	Can be used with underfloor heating			
WATERPROOF	48 h	48 h	48 h	48 h
LOCK	Megaloc Aqua Protect	Megaloc Aqua Protect	Megaloc Aqua Protect	Megaloc Aqua Protect
GUARANTEE	10 years	25 years	25 years	25 years

	QUERRA BALANCE WR	QUERRA BALANCE PLUS WR	NOVELTY QUERRA MAGNA WR	NOVELTY QUERRA MAGNA PLUS WR
DIMENSIONS	1380 x 191 mm	1380 x 242 mm	1261 x 192 mm	1261 x 192 mm
THICKNESS	8 mm	8 mm	8 mm	8 mm
ABRASION CLASS	AC5	AC5	AC4	AC5
NUMBER OF PIECES IN PACKAGING	9	7	9	9
SURFACE IN PACKAGING	2,372 m <sup>2</sup>	2,338 m <sup>2</sup>	2,179 m <sup>2</sup>	2,179 m <sup>2</sup>
PANEL FINISH	four-sided V-groove			
PANEL STRUCTURE	Bosco Oak Cremso oak Mora Oak Tersa Oak synchronous  Hadar Oak Siesta Oak aged wood	Avell Oak Crud Oak Latte Oak Mairo Oak Ore Oak Skogen Oak Synchronized	Albero Oak matt wood  Evra Oak Fuert Oak Sargas Oak Verme oak synchronous	Alva Oak matt wood  Ginger Oak Lino Oak Thistle Oak Siber Oak synchronous
UNDERFLOOR HEATING	Can be used with underfloor heating			
WATERPROOF	24 hours	72 h	24 h	24 h
LOCK	Aqua Pearl	Aqua Pearl	Uniclic	Uniclic
GUARANTEE	30 years	30 years	25 years	25 years



## QUERRA CLASSIC WR



**NORD OAK**  
Glossy wood structure



**MODEST OAK**  
Glossy wood structure



**DAB COPPER**  
Glossy wood structure



**DAB ALMOND**  
Matte wood structure



**OAK TRUST**  
Synchronous structure

## QUERRA HARMONY WR



**RUSTIC OAK**  
Glossy wood structure



**CALDA OAK**  
Matte wood structure



**CALM OAK**  
Glossy wood structure



**NEST OAK**  
Glossy wood structure

## QUERRA SLIM PRESTIGE WR



**GENOA OAK**  
Synchronous structure



**DAB SHERWOOD**  
Synchronous structure



**DAB VERMONT**  
Synchronous structure



**EMBER OAK**  
Synchronous structure



**CRESTON**  
OAK Synchronous structure



## QUERRA PRESTIGE WR



**DAB LEGGERO**  
Synchronous structure



**OAK LUVA**  
Synchronous structure



**DAB ORSO**  
Synchronous structure

## QUERRA BALANCE WR



**CREMSO OAK**  
Synchronous structure



**MORA OAK**  
Synchronous structure



**DAB TERSA**  
Synchronous structure



**SIESTA OAK**  
Aged wood structure



**BOSCO OAK**  
Synchronous structure



**HADAR OAK**  
Aged wood structure

## QUERRA BALANCE PLUS WR



**DAB LATTE**  
Synchronous structure



**SKOGEN OAK**  
Synchronous structure



**CRUD OAK**  
Synchronous structure



**OAK**  
ORE Synchronous structure



**MARRO**  
OAK Synchronous structure



**AVEL OAK**  
Synchronous structure

NOVELTY

## QUERRA MAGNA WR



FUERTA OAK  
Synchronous structure



EVRA OAK  
Synchronous structure



SARGAS OAK  
Synchronous structure



OAK ALBERO  
Matte wood structure



VERME OAK  
Synchronous structure

NOVELTY

## QUERRA MAGNA PLUS WR



SIBER OAK  
Synchronous structure



ALVA OAK  
Matte wood structure




LINO OAK  
Synchronous structure



GINGER OAK  
Synchronous structure



HOLY OAK  
Synchronous structure

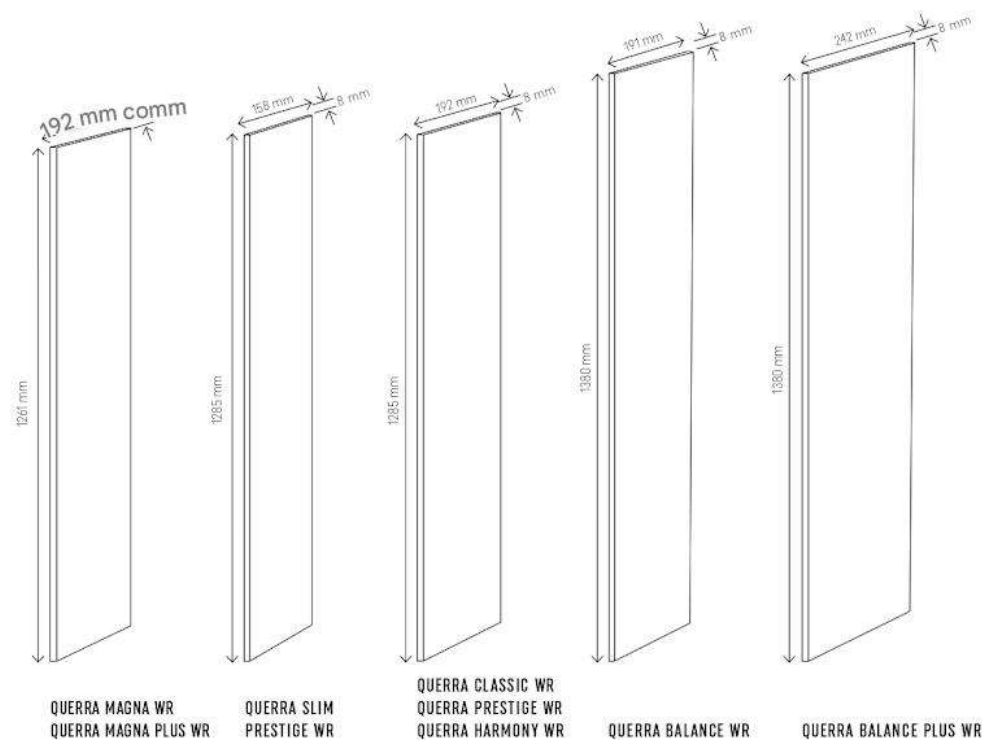




## FLOOR SYSTEM

At VOX, we think about the interior comprehensively. That is why we have created a flooring system that includes, in addition to the floor collection, stylistically matched skirting boards and high-quality underlays. The range of skirting boards includes three lines. Espumo, manufactured using Kerracore technology, is waterproof, lightweight and impact-resistant. The main advantage of the Evera skirting board made of MDF is quick assembly with glue, while Estilo is distinguished by a combination of excellent design with a functional construction that allows for hiding cables.


You can find all models and prices at [vox.pl](http://vox.pl).

## ESPUMO SKIRTING BOARDS

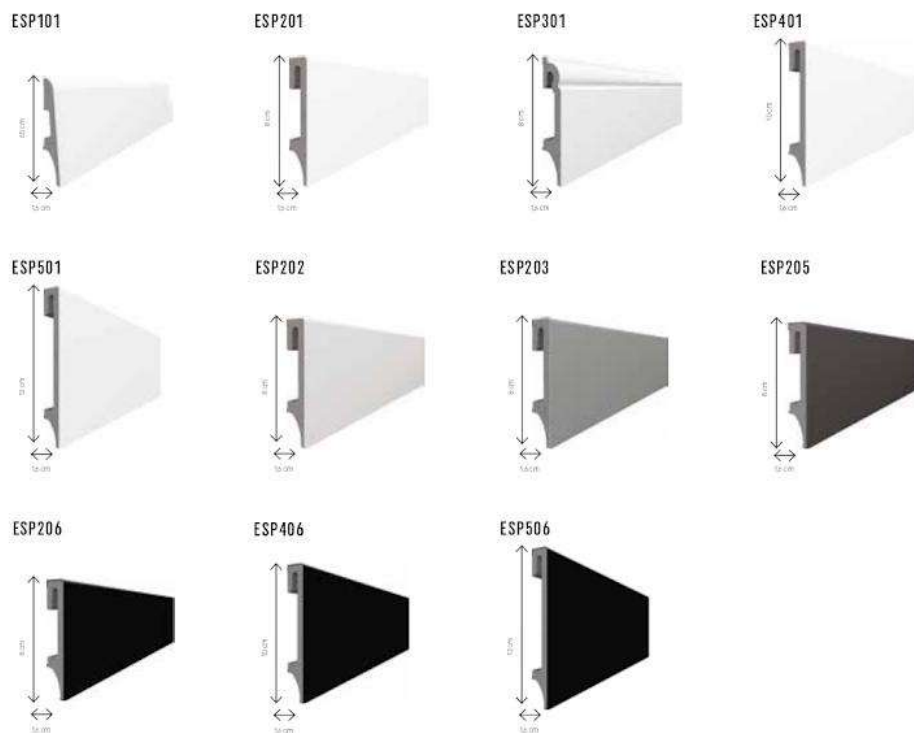


Length of slats: 240 cm.

## EVERA SKIRTING BOARDS

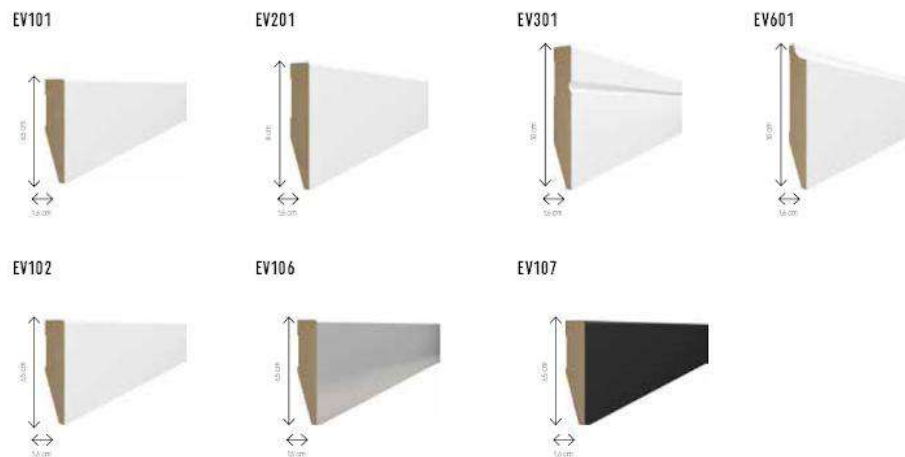


Length of strips: 240 cm.

## ESTILO SKIRTING BOARDS

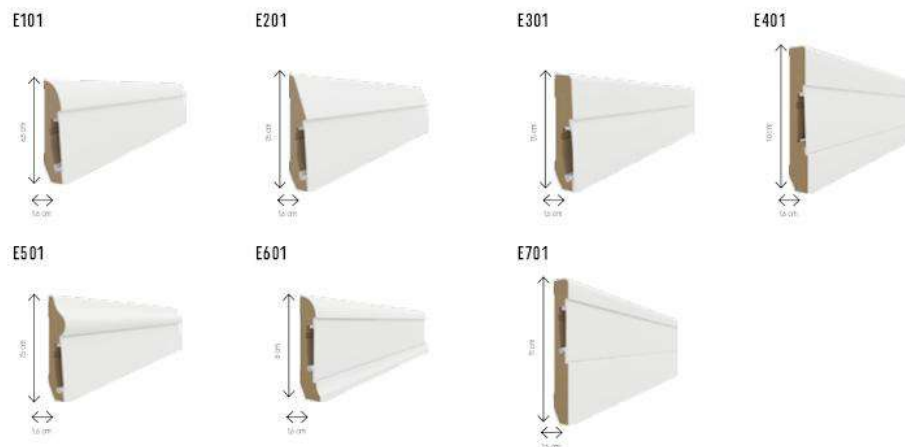

Length of strips: 240 cm.

# MAX-POD FOUNDATIONS

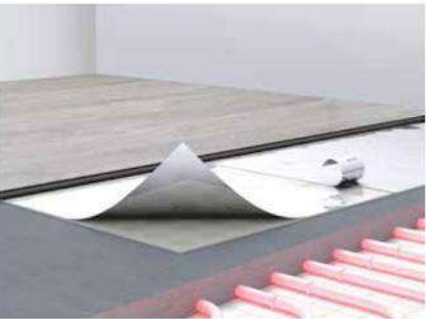

**MAX-POD ALU EXTREME**
1 x 8 m = 8 m²

Permanently elastic floor underlay with patented RWS Barrier technology ensuring optimal sound insulation. It is designed for rooms exposed to intensive use. It guarantees the highest efficiency of underfloor heating. This is an underlay for the most demanding. Particularly recommended for vinyl floors, but can also be used under panels and wooden floors.

1.6 mm

↑

THICKNESS

↑↑↑

13-130 W / m²

THERMAL

25-35 kg

LOAD

SD > 75 m

MOISTURE

10dB


ACOUSTIC

RWS

ELIMINATING NOISE

ECO-97%

NATURAL INGREDIENTS

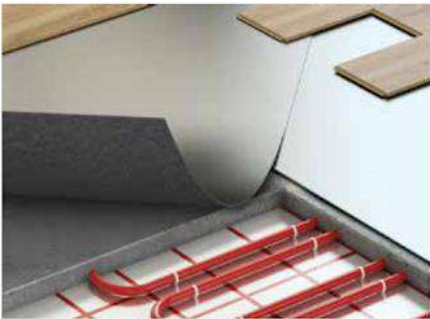

**MAX-POD ALU PRIME**
1 x 8.5 m = 8.5 m²

Universal polyurethane-mineral underlay integrated with foil Suitable for laminate floors, three-layer boards, hybrids on HDF core and veneered wooden floors. Ideal for underfloor heating. Connection with Alu-Tape provides permanent protection against moisture.

1.6 mm

↑

THICKNESS

↑↑↑

13-130 W / m²

THERMAL

25-35 kg

IMMUNITY PROTECTION FOR LOADS BEFORE MOISTURE

SD > 75 m

MOISTURE

10dB

ACOUSTIC

RWS

ALUMINUM FOLIO FOR MOISTURE

ECO-97%

FLEXIBILITY



**MAX-POD ANTISLIP MAX**
1 x 15 m = 15 m²

Modern high-density polyethylene underlay. It is distinguished by an anti-slip layer that protects delicate vinyl floor locks from damage. It works great with underfloor heating. Particularly recommended for vinyl floors, but can also be used for panels and wooden floors. Layered boards and panels require the use of foil.

1.2 mm

↑

THICKNESS

↑↑↑

13-130 W / m²

THERMAL

25-35 kg

LOAD

SD > 75 m


ACOUSTIC INSULATION PROTECTION

10dB

PROTECTION

ECO

ECO

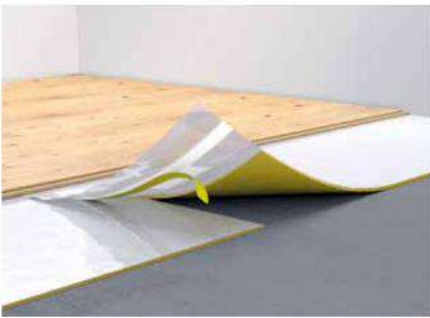

**MAX-POD SD PROFESSIONAL**
1 m x 15 m = 15 m²

Polyethylene underlay with integrated vapor barrier (with overlap and adhesive tape) and increased sound absorption capacity. It is easy to install and after unrolling creates a perfectly smooth surface. Underlay for wooden floors and floor panels.

2 mm

↑

THICKNESS

↑↑↑

13-130 W / m²

THERMAL

25-35 kg

IMMUNITY PROTECTION FOR PRIZED LOADS

SD > 75 m

MOISTURE

10dB

SOLOWAY ACOUSTIC MOUNTING

FAST

FAST

ECO

ECO



**MAX-POD ALU PROFESSIONAL**
1 m x 15 m = 15 m²

High density polyethylene underlay with integrated metalized vapour barrier (with overlap and adhesive tape). Ensures quick and easy installation. Particularly recommended for underfloor heating. Underlay for wooden layered floors and floor panels.

2 mm

↑

THICKNESS

↑↑↑

13-130 W / m²

THERMAL

25-35 kg

LOAD

SD > 75 m

PROTECTION

10dB

ACOUSTIC INSULATION INSTALLATION

FAST

FAST

ECO

ECO